MEADOW SKIPPER 4S

BY DAVID CHAMPION

A 53"SPAN STRUT BRACED MODEL.
WITH PLUG-IN WING HALVES
FOR .20CU IN. 4-STROKES
AND 3 FUNCTION RADIO

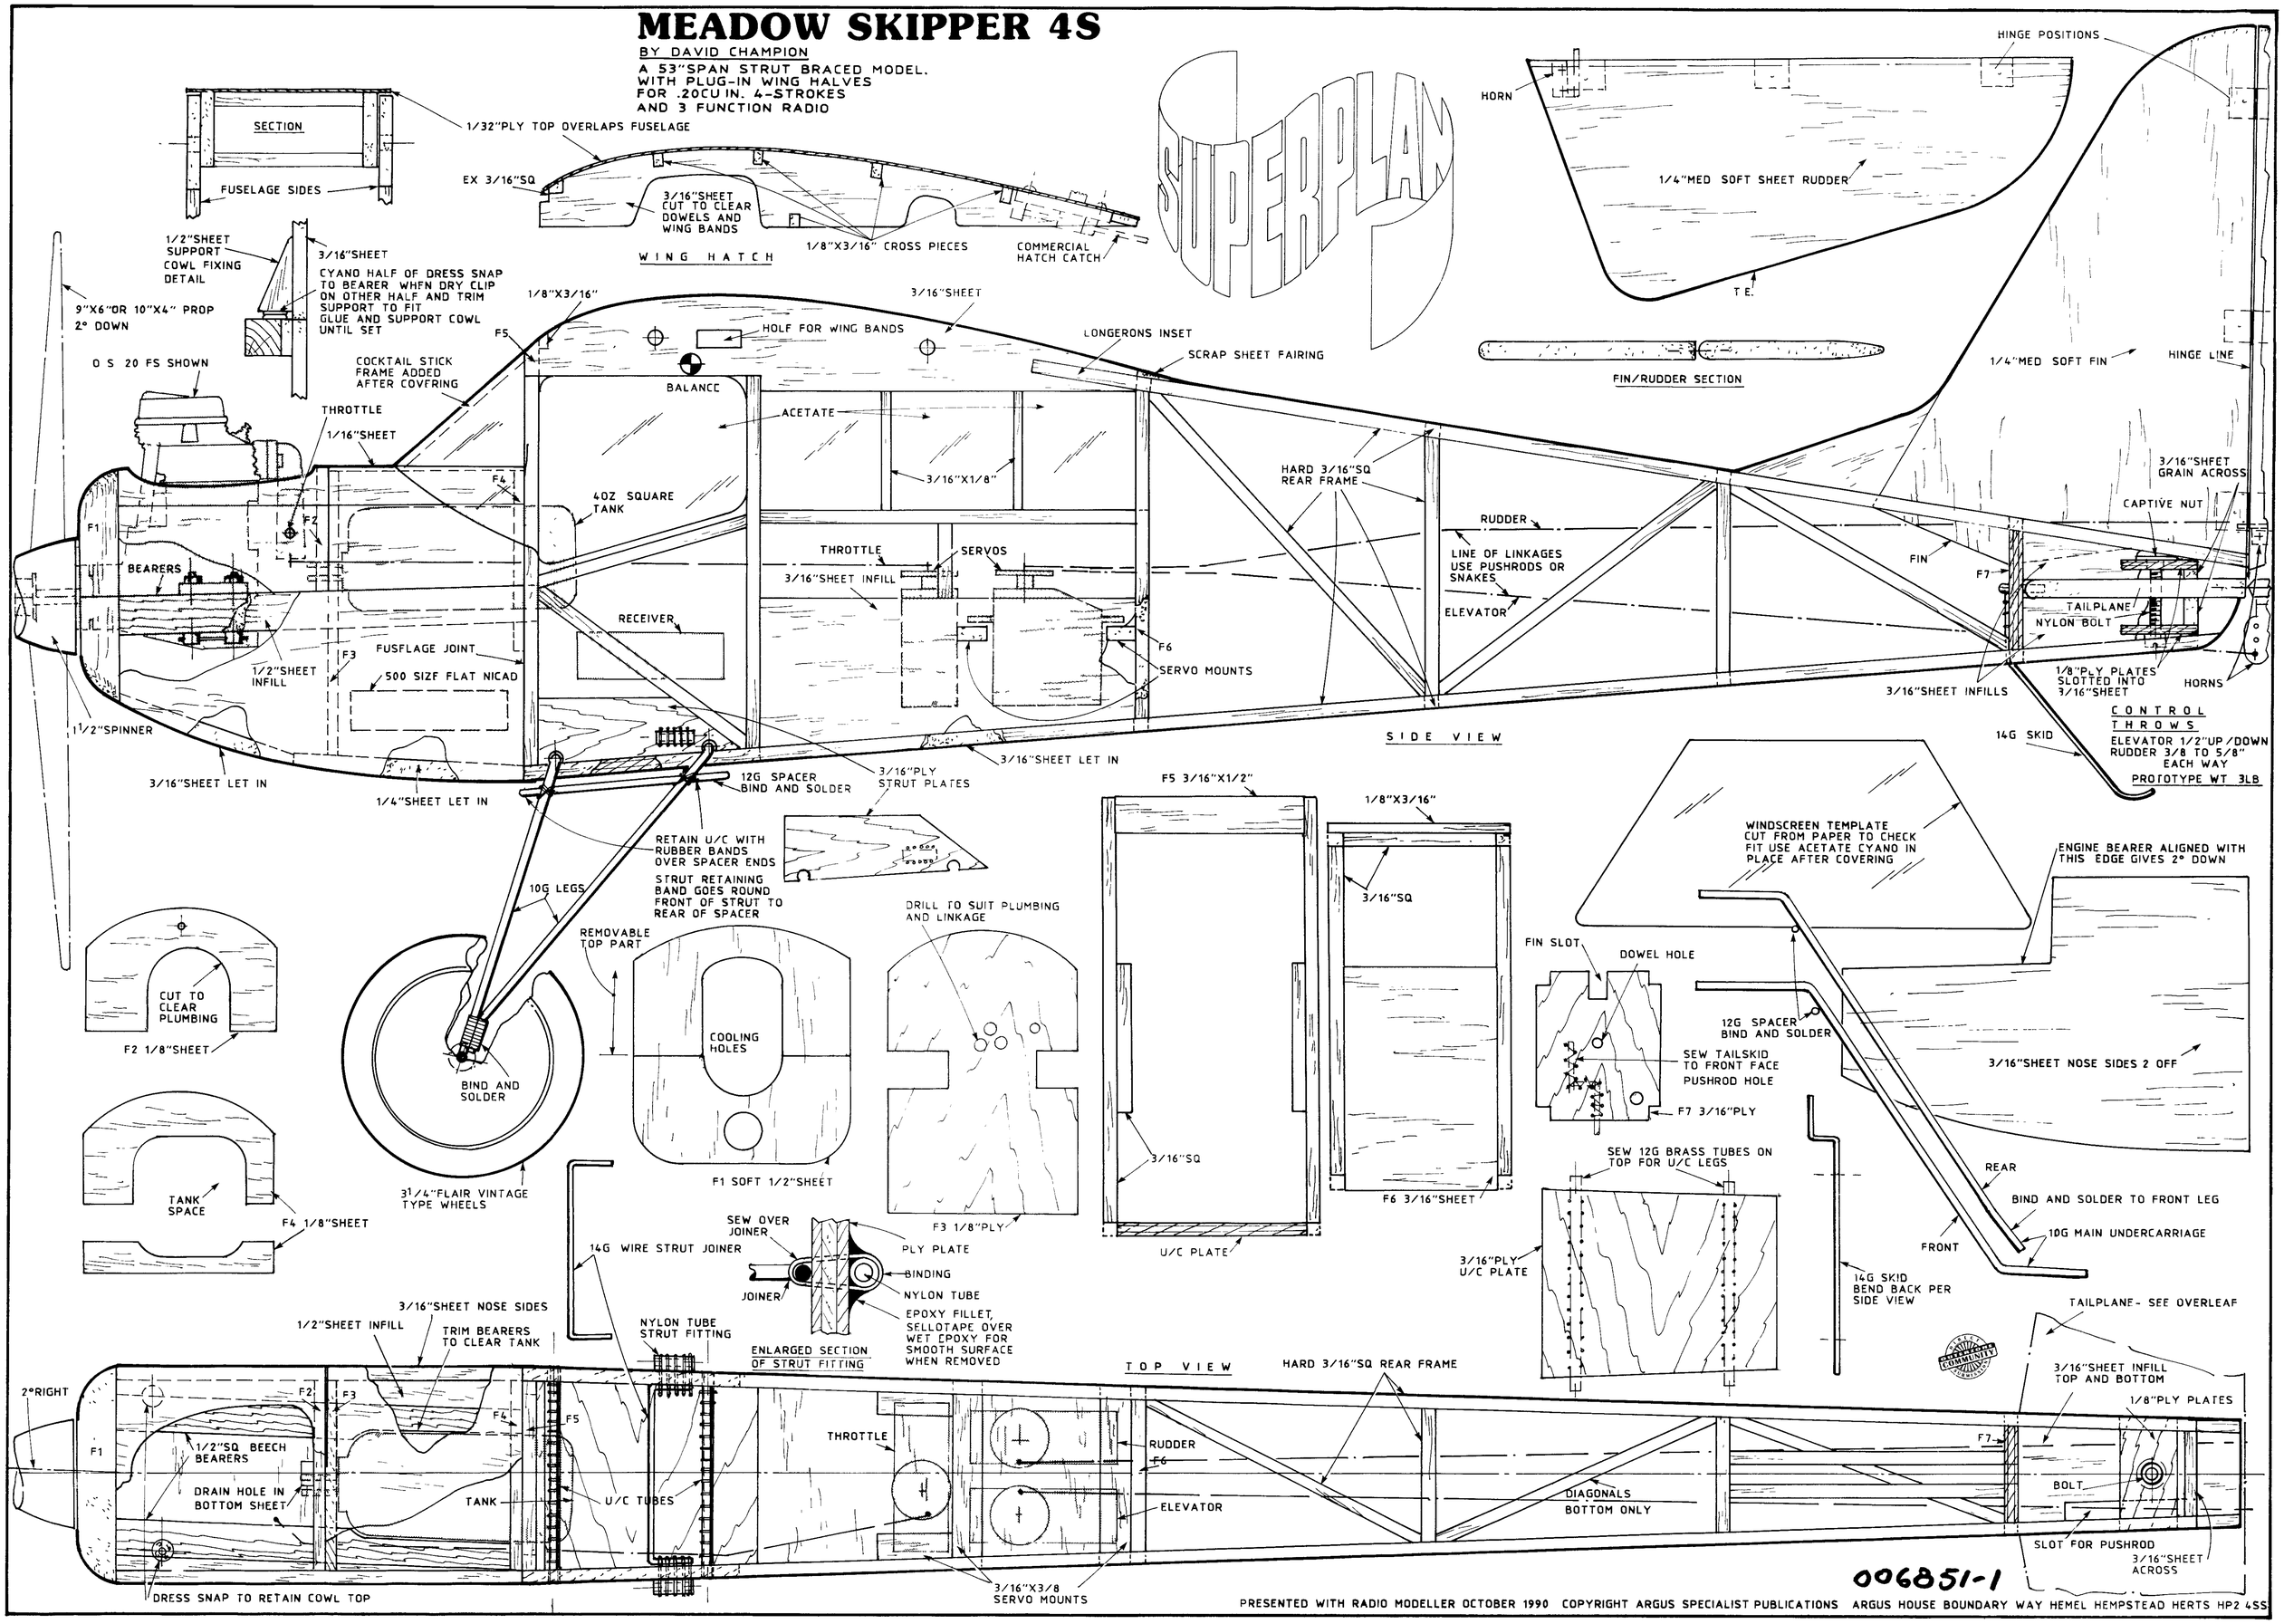

PRESENTED WITH RADIO MODELLER OCTOBER 1990 COPYRIGHT ARGUS SPECIALIST PUBLICATIONS ARGUS HOUSE BOUNDARY WAY HEMEL HEMPSTEAD HERTS HP2 4SS

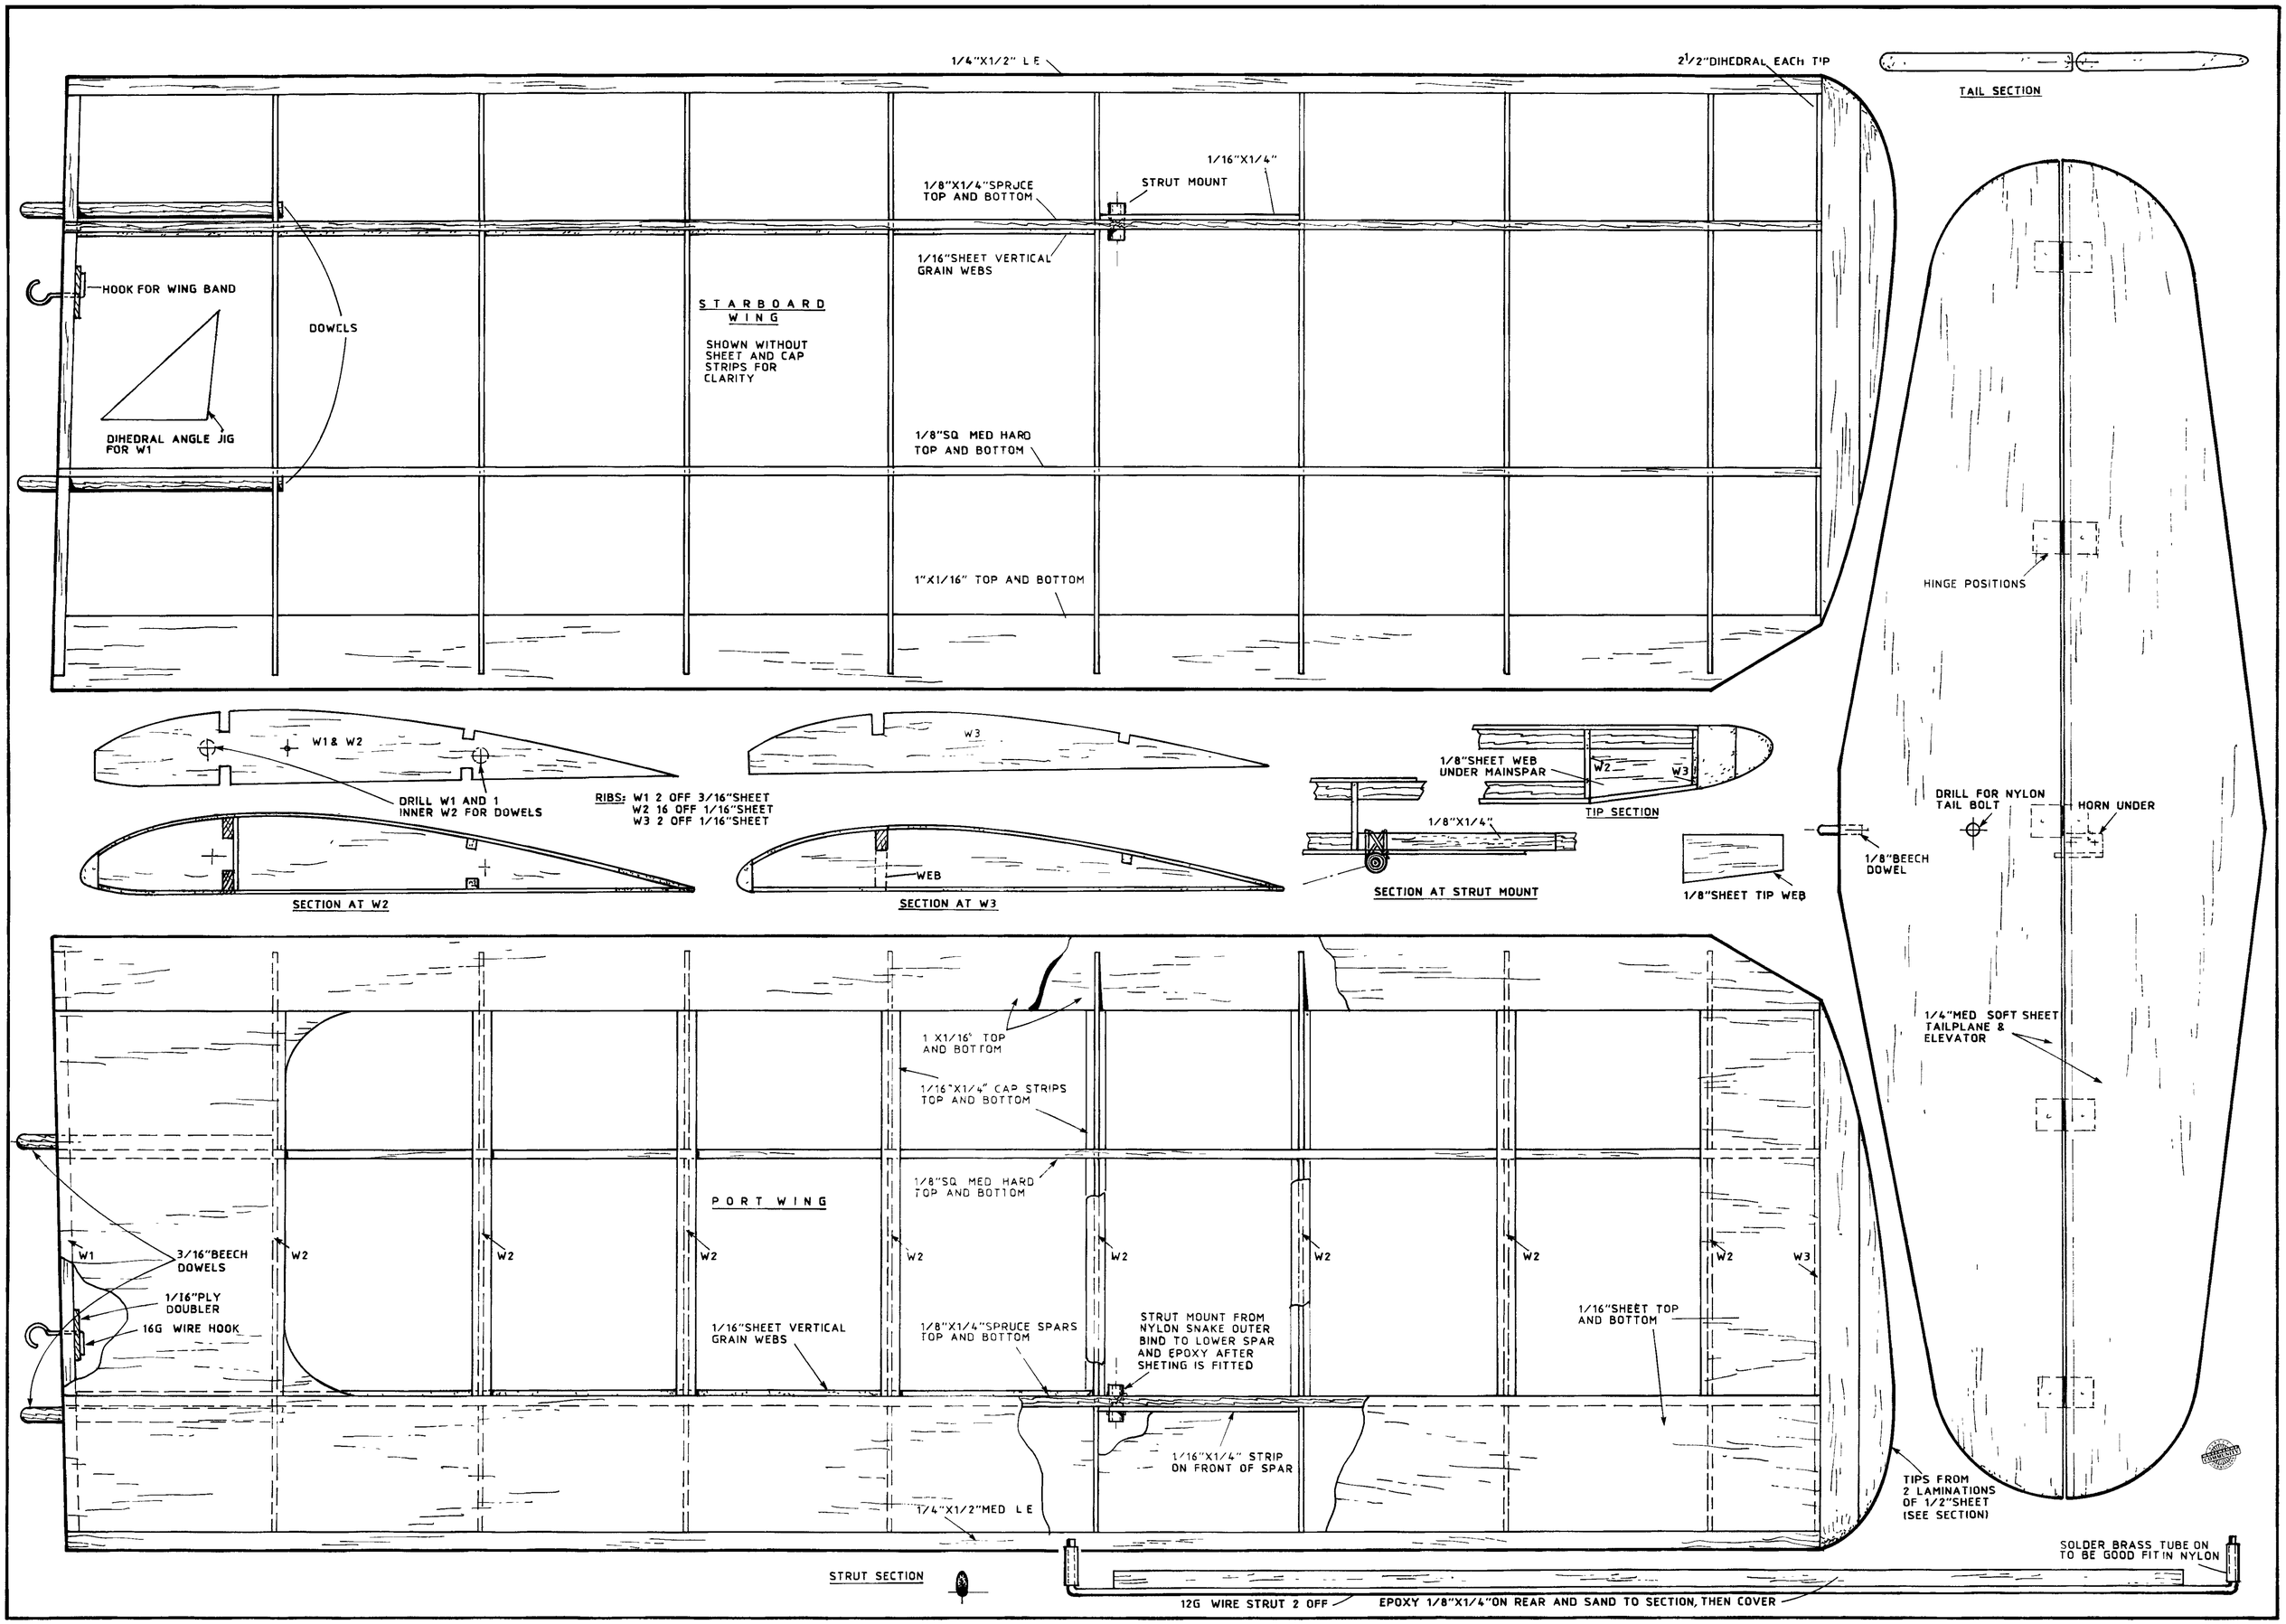
1/4"X1/2" L E
2 1/2"DIHEDRAL EACH TIP
TAIL SECTION
1/8"X1/4"SPRUCE TOP AND BOTTOM
STRUT MOUNT
1/16"X1/4"
1/16"SHEET VERTICAL GRAIN WEBS
HOOK FOR WING BAND
DOWELS
STARBOARD WING
SHOWN WITHOUT SHEET AND CAP STRIPS FOR CLARITY
DIHEDRAL ANGLE JIG FOR W1
1/8"SQ MED HARD TOP AND BOTTOM
1"X1/16" TOP AND BOTTOM
HINGE POSITIONS
W1 & W2
DRILL W1 AND 1 INNER W2 FOR DOWELS
RIBS: W1 2 OFF 3/16"SHEET
W2 16 OFF 1/16"SHEET
W3 2 OFF 1/16"SHEET
W3
1/8"SHEET WEB UNDER MAINSPAR
W2
W3
TIP SECTION
1/8"X1/4"
SECTION AT STRUT MOUNT
1/8"SHEET TIP WEB
DRILL FOR NYLON TAIL BOLT
HORN UNDER
1/8"BEECH DOWEL
SECTION AT W2
WEB
SECTION AT W3
1 X1/16" TOP AND BOTTOM
1/16"X1/4" CAP STRIPS TOP AND BOTTOM
1/4"MED SOFT SHEET TAILPLANE & ELEVATOR
PORT WING
1/8"SQ MED HARD TOP AND BOTTOM
W1
3/16"BEECH DOWELS
1/16"PLY DOUBLER
16G WIRE HOOK
W2
W2
W2
W2
W2
W2
W2
W2
W3
1/16"SHEET VERTICAL GRAIN WEBS
1/8"X1/4"SPRUCE SPARS TOP AND BOTTOM
STRUT MOUNT FROM NYLON SNAKE OUTER BIND TO LOWER SPAR AND EPOXY AFTER SHETING IS FITTED
1/16"SHEET TOP AND BOTTOM
1/16"X1/4" STRIP ON FRONT OF SPAR
1/4"X1/2"MED L E
TIPS FROM 2 LAMINATIONS OF 1/2"SHEET (SEE SECTION)
SOLDER BRASS TUBE ON TO BE GOOD FIT IN NYLON
STRUT SECTION
12G WIRE STRUT 2 OFF
EPOXY 1/8"X1/4"ON REAR AND SAND TO SECTION, THEN COVER

006851-2